


Green Pin Standard Bow Shackles with Safety Nut and Bolt Pin - G-4163

- Grade 6 high tensile steel, quenched and tempered.
- Minimum breaking load is 6 times the W.L.L.
- Conforms to EN 13889 and meets the performance requirements of US Fed Spec RC-C-271 Type IVA class 2, Grade A.
- Hot dipped galvanised.
- Temperature range -20 ° C upto +200 ° C.
- Supplied with proof load certificate, material certificate available on request.
- DNV Type Approved product (see product support for the latest certificate).

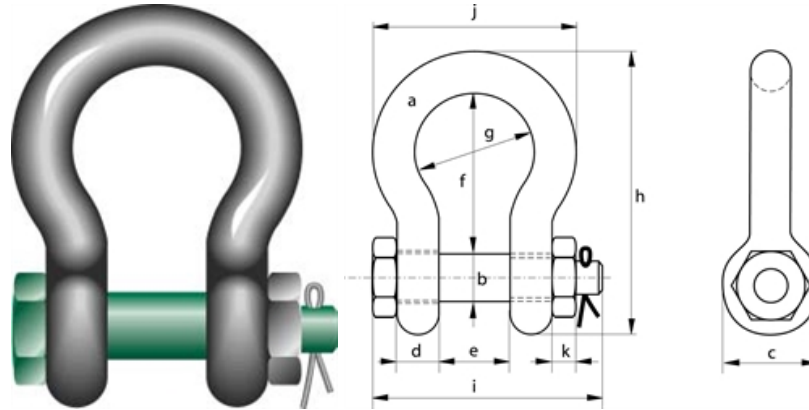

Code	W.L.L (tonnes)	a (mm)	b (mm)	c (mm)	d (mm)	e (mm)	f (mm)	g (mm)	h (mm)	i (mm)	j (mm)	k (mm)	Weight (kgs)
A0302	0.5	7	8	17	7	12	29	20	54	43	37	4	0.06
A0303	0.75	9	10	21	9	13.5	32	22	61	51	42	5	0.11
A0304	1	10	11	23	10	17	36.5	26	71	61	49	8	0.16
A0305	1.5	11	13	26	11	19	43	29	80	68	54	11	0.22
A0306	2	13.5	16	34	13.5	22	51	32	91	83	63	13	0.42
A0307	3.25	16	19	40	16	27	64	43	114	99	79	17	0.74
A0308	4.75	19	22	47	19	31	76	51	136	115	94	20	1.18
A0309	6.5	22	25	53	22	36	83	58	157	131	107	23	1.77
A0310	8.5	25	28	60	25	43	95	68	176	151	124	25	2.58
A0311	9.5	28	32	67	28	47	108	75	197	167	137	28	3.66
A0312	12	32	35	74	32	51	115	83	218	179	154	31	4.91
A0313	13.5	35	38	80	35	57	133	92	240	198	170	34	6.54
A0314	17	38	42	89	38	60	146	99	262	202	183	19	8.19
A0315	25	45	50	104	45	74	178	126	314	244	226	24	14.22
A0316	35	50	57	111	50	83	197	138	358	270	250	27	19.85
A0330	42.5	57	65	134	57	95	222	160	414	302	287	30	28.33
A0317	55	65	70	145	65	105	260	180	463	330	329	33	39.59
A0318	85	75	83	163	75	127	329	190	556	376	355	40	62