


## Green Pin Standard Bow Shackles with Screw Collar Pin - G-4161

- Grade 6 high tensile steel, quenched and tempered.
- Minimum breaking load is 6 times the W.L.L.
- Conforms to EN 13889 and meets the performance requirements of US Fed Spec RC-C-271 Type IVA class 2, Grade A.
- Hot dipped galvanised.
- Temperature range -20 ° C upto +200 ° C.
- Supplied with proof load certificate, material certificate available on request.
- DNV Type Approved product (see product support for the latest certificate).

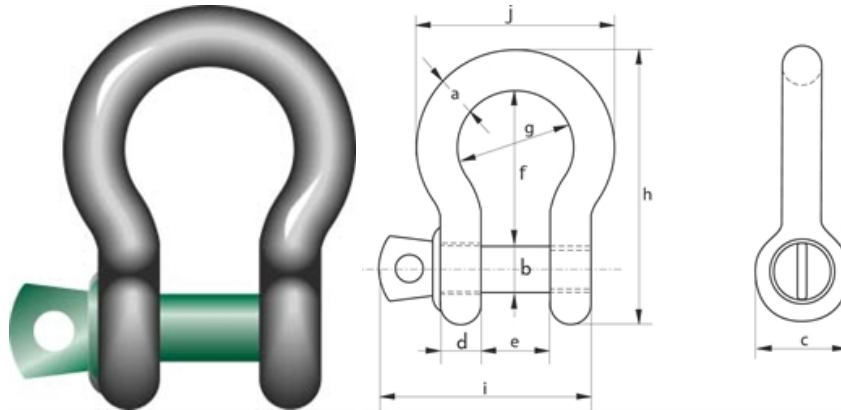

Code	W.L.L tonnes	a (mm)	b (mm)	c (mm)	d (mm)	e (mm)	f (mm)	g (mm)	h (mm)	i (mm)	j (mm)	Weight kgs
A0101	0.33	5	6	12.5	5	9.5	22	16	41	31	28	0.02
A0102	0.5	7	8	17	7	12	29	20	54	40	37	0.05
A0103	0.75	9	10	21	9	13.5	32	22	61	49	42	0.1
A0104	1	10	11	23	10	17	36.5	26	71	56	49	0.14
A0105	1.5	11	13	26	11	19	43	29	80	68	54	0.19
A0106	2	13.5	16	34	13.5	22	51	32	91	76	63	0.36
A0107	3.25	16	19	40	16	27	64	43	114	93	79	0.63
A0108	4.75	19	22	47	19	31	76	51	136	107	94	1.01
A0109	6.5	22	25	53	22	36	83	58	157	123	107	1.5
A0110	8.5	25	28	60	25	43	95	68	176	141	124	2.21
A0111	9.5	28	32	67	28	47	108	75	197	158	137	3.16
A0112	12	32	35	74	32	51	115	83	218	176	154	4.31
A0113	13.5	35	38	80	35	57	133	92	240	192	170	5.55
A0114	17	38	42	89	38	60	146	99	262	208	183	7.43
A0115	25	45	50	104	45	74	178	126	314	250	226	12.84
A0116	35	50	57	111	50	83	197	138	358	281	250	18.15
~	42.5	57	65	134	57	95	222	160	414	321	287	26.29
A0117	55	65	70	145	65	105	260	180	463	355	329	37.6