

## **WH L4 Compact Lever Hoist**

The Hackett WH L4 250kg and 500kg lever hoist meets and exceeds the requirements of the following international standards:


British and European Standard BS EN13157:2004 + AI:2009 American Standard ASME B30.21-2014 Australian Standard AS1418.2-1997 NORSOK R-002: 2017 (except for overload limiter).


The design and specification of the William Hackett WH-L4 compact lever hoist includes:

- WORKING LOAD LIMIT RANGE: 250kg and 500kg.
- LIGHT LOAD CAPABILITY: the WH L4 compact lever hoist is tested and certified at 2% of the lever hoist rated capacity.
- TWIN PAWL: double safety; fitted as standard.
- SAFETY FACTOR: 4:1.
- SAFETY LATCHES: the WH L4 compact lever hoist top and bottom hooks are fitted with heavy duty cast steel latches. The latch and hook tips are integrated creating a strong and robust hook closure.
- OVERLOAD INDICATOR MARKS: the WH L4 compact lever hoist top and bottom hooks have, as part of the hook forging, overload indicator marks either side of the hook throat.
- LOAD CHAIN: the WH L4 compact lever hoists are fitted with load chain that generally complies with international standard BS EN818-7. Grade T (8).
- ROBUST END STOP: Ergonomically designed load chain end stop allows the operative to secure a firm grip when using the end stop to adjust the chain.
- COMPACT LEVER HOISTS: supplied with a hard wearing belt bag carry case.
- TEMPERATURE RANGE: -20°C to + 120°C.
- PROOF TESTED: every hoist is proof tested to 1.5 times the Working Load Limit.
- MANUFACTURED AND PROOF TESTED in the U.K.



## **SPECIFICATION AND DIMENSIONS**

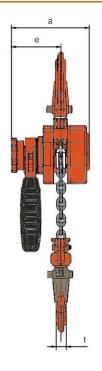

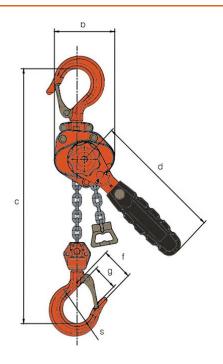

Part Code	WLL tonnes	No. of Falls	Load Chain mm	Standard Lift m	A mm	B mm	C mm	D mm	E mm	F mm	G mm	S mm	T mm	Mass kg
032.025	0.25	1	3.2 x 9	1.5	90	68	200	150	56	35.5	20	32	11	1.6
032.050	0.50	1	4.3 x 12	1.5	98	81	250	172	62	42	21	34.5	12.5	2.6







